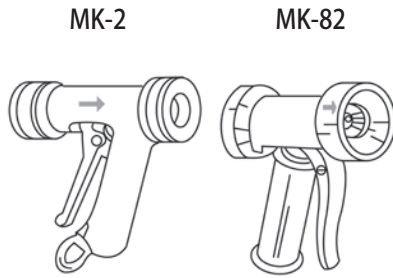


**MK**

### Features

1. Trigger operated water gun. Front trigger or rear trigger available
2. Perfect water consumption control
3. One-handed mode with either variable spray or direct jet
4. Automatic and immediate shut-off when the trigger is released

### Suitable for

MK2 is suitable for most industrial applications

MK-MV is recommended for use with Steam-Water-Mixing Valves

Model	Material	Rubber Cover	Trigger	Orifize Size		Maximum Pressure	
				in	mm	MPa	psi
MK-2	Gunmetal or Stainless Steel	Black or White	rear	5/16 "	7,9	2,8	406.0
MK-OH				7/16 "	11,1		
MK-MV				9/16 "	14,3	0,7	101.5
MK-78	Gunmetal	Black or White	front	5/16 "	7,9	1,4	203.0
MK-80				7/16 "	11,1		
MK-82				9/16 "	14,3	0,7	101.5

Pressure		Orifize Size			Orifize Size		
		5/16 "	7/16 "	9/16 "	5/16 "	7/16 "	9/16 "
MPa	psig	l/min			GPM		
0,035	5.0	3,2	13,5	15,0	0.84	3.56	3.96
0,07	10.2	5,6	20,0	21,0	1.48	5.28	5.54
0,1	14.5	7,0	22,5	24,0	1.85	5.94	6.34
0,2	29.0	10,0	25,0	36,0	2.64	6.60	9.50
0,3	43.5	12,5	32,0	47,0	3.30	8.45	12.41
0,35	50.8	14,5	37,0	52,0	3.83	9.77	13.73
0,4	58.0	16,0	38,0	55,0	4.22	10.03	14.52
0,5	72.5	18,0	40,0	60,0	4.75	10.56	15.84
0,6	87.0	20,5	42,0	65,0	5.41	11.09	17.16
0,7	101.5	22,3	44,0	69,0	5.89	11.62	18.22
1,0	145.0	27,5	51,0	-	7.26	13.46	-
1,5	217.5	35,0	62,0	-	9.24	16.37	-
2,0	290.0	43,0	74,0	-	11.35	19.54	-
2,5	362.5	50,5	85,0	-	13.33	22.44	-